



19" RACK MOUNT BRACKET for WORKFRAME

RACK-EAR

Owner's Manual

Thank you very much for choosing a dotRed product.
We hope that this unit will bring you countless hours of fun.
Keep this owner's manual handy for future reference.
The latest version of this manual is available for free
download (PDF) on our website.


© 2016 dotRed Audio Designs Co., Ltd.

Rev. E01


INCLUDED ITEMS

Make sure that the package contains all the included items listed below.

Owner's Manual (this document)



Brackets (2pcs)

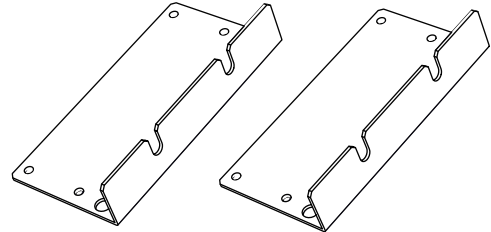

Note: There is no distinctive L and R markings, as both rack ears are identical and can be installed on either side.

Note: No screws are included in the package, as installation is performed using the screws already fitted on the WORKFRAME84's side panels.

If you notice any sign of damage or abnormality, such as scratches, bends, etc. upon unpacking the rack ears, contact the store where you bought them.
You can also get in touch with us through the "SUPPORT" page of our website at: <https://www.dotred-audio-designs.com>


INSTALLING THE RACK EARS

Note: A Philips (+) screwdriver is needed for the installation.


CAUTION:

If you are using an electric screwdriver, make sure it is fitted with a clutch.
Be careful not to apply excessive force/torque when tightening the screws.
Using excessive force may lead to injuries and/or cause damage to the unit.


- ① Confirm that there are 2 sets of 4 screws on each side panel of the WORKFRAME84, one set of 4 small screws and one set of 4 bigger screws.

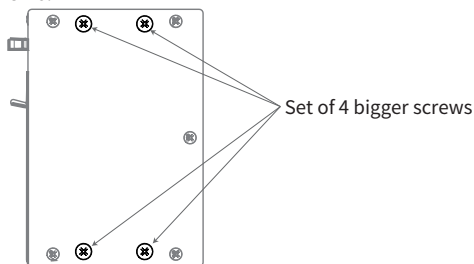


- ② Remove the set of 4 bigger screws on the side panel using the Philips (+) screwdriver.

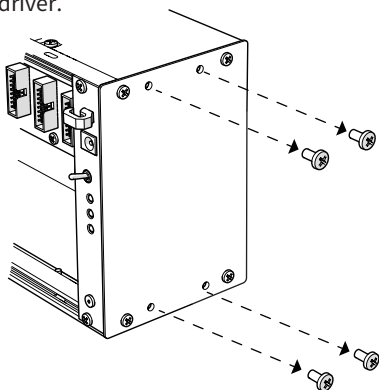

- ③ Put one of the rack ears on the side panel as illustrated below, and fix it in place using the 4 screws removed in step 2. Do not tighten the screws all the way yet so as to allow adjustment.

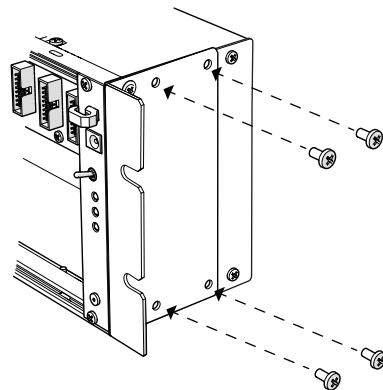

- ④ Align the rack ear onto the WORKFRAME 84's side panel, making sure the rack ear's edges are flush with the top and bottom edges of the case, as well as with the POWER BASE's panel. When both are perfectly aligned, firmly tighten the 4 screws, following a diagonal pattern.

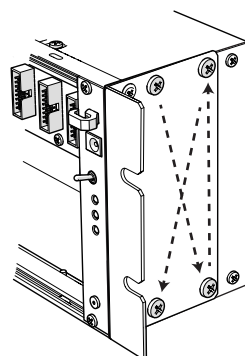

Note: Make sure all the 4 screws are firmly tightened, as loose screws could cause a misalignment of the unit when mounted in a 19-inch rack. If you notice any misalignment, loosen the screws and perform the alignment again.

Follow the same procedure to install the other rack ear.